

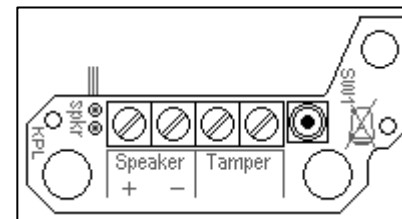


Fig. 1. I30 Teletone Tampered Sounder 16 Ohm

To ensure correct seating, (when assembling Teletone Casework), that the case cover pin is on the topmost inside face, (shown by the arrow).

Although possible to rotate the top cover through 180°, it will not seat properly when pressed together.

	Model	I30
Grade 3 Class II	●	
ABS Body & Cover	●	
Resistor 16 Ohm	●	
TACT-Switch Tamper	●	
Surface Mounted	●	
Snap Fit Case	●	
Concealed Fixings	●	
4 terminals	●	
<u>Dimensions</u>		
Length		100mm
Width		67mm
Height		32mm



**Description:**  
Teletone Tampered Sounder

**Materials:**  
Case Body and Cover - ABS

**Temperature Range:**  
-40°C - +50°C

**Tamper:**  
TACT switch

**Speaker:**  
Diameter 45mm  
Mylar – 16 Ohm, 0.25 Watt

**Frequency range:**  
4Khz

**Resonance:**  
450Hz ±90Hz

**Sound Power Output**  
86 ±2dB @ 50cm

**Voltage Range:**  
0-125v AC Max  
0-200v DC Max

**Colour:**  
White

**Fittings:**  
4 x Wire Clamping Terminals  
4 x Concealed Fixing Screws